

The background image shows an industrial site, likely a gas processing or distribution station. It features a complex network of large, yellow-painted pipes and valves. Two workers in blue uniforms and hard hats are visible: one in the middle ground and another in the foreground walking towards the camera. The ground is paved with grey bricks. In the background, there are green trees, a fence, and distant mountains under a clear sky. A yellow banner is at the top of the image.

电仪检测专家

济宁鲁科

合作伙伴

>>>

济宁鲁科

让最先进的检测方案更广泛的服务于社会



三防式超声波测厚仪

信固 M5-C3+



- 英国信固超仪公司中国总代理
- 1.2m防摔，30m防水
- 中文显示，快捷操作
- 双屏显示，可选择性关闭

穿透涂层厚度	3+	3+Pro	3ME
穿透涂层厚度	×	1-2mm	20mm
30m防水 1.2m防摔	√	√	√
中文显示	√	√	√
双屏显示	√	√	√
单次回波	√	√	√
两次回波	×	√	√
多次回波	×	×	√
A扫模式	×	√	×
B扫模式	×	√	×
350℃高温检测	×	√	×

可以像手表一样戴在手腕上操作
解放一只手，使用更方便



双屏显示

>>>

双LED 彩色显示屏显示



主屏幕和顶端屏幕均可选择性关闭，
主屏幕关闭后按任意键亮屏



主屏幕亮屏 ☒

顶端屏幕亮屏 ☒



主屏幕和顶端屏幕均可选择性关闭，
主屏幕关闭后按任意键亮屏



主屏幕亮屏 ☒

顶端屏幕亮屏 ☒



在高空作业时，
可用绪带固定设备更好的检测数值



1.2m防摔

>>>


可 1.2m 高自由脱落



30m防水

>>>

可以在耐水压水深 30m 处工作

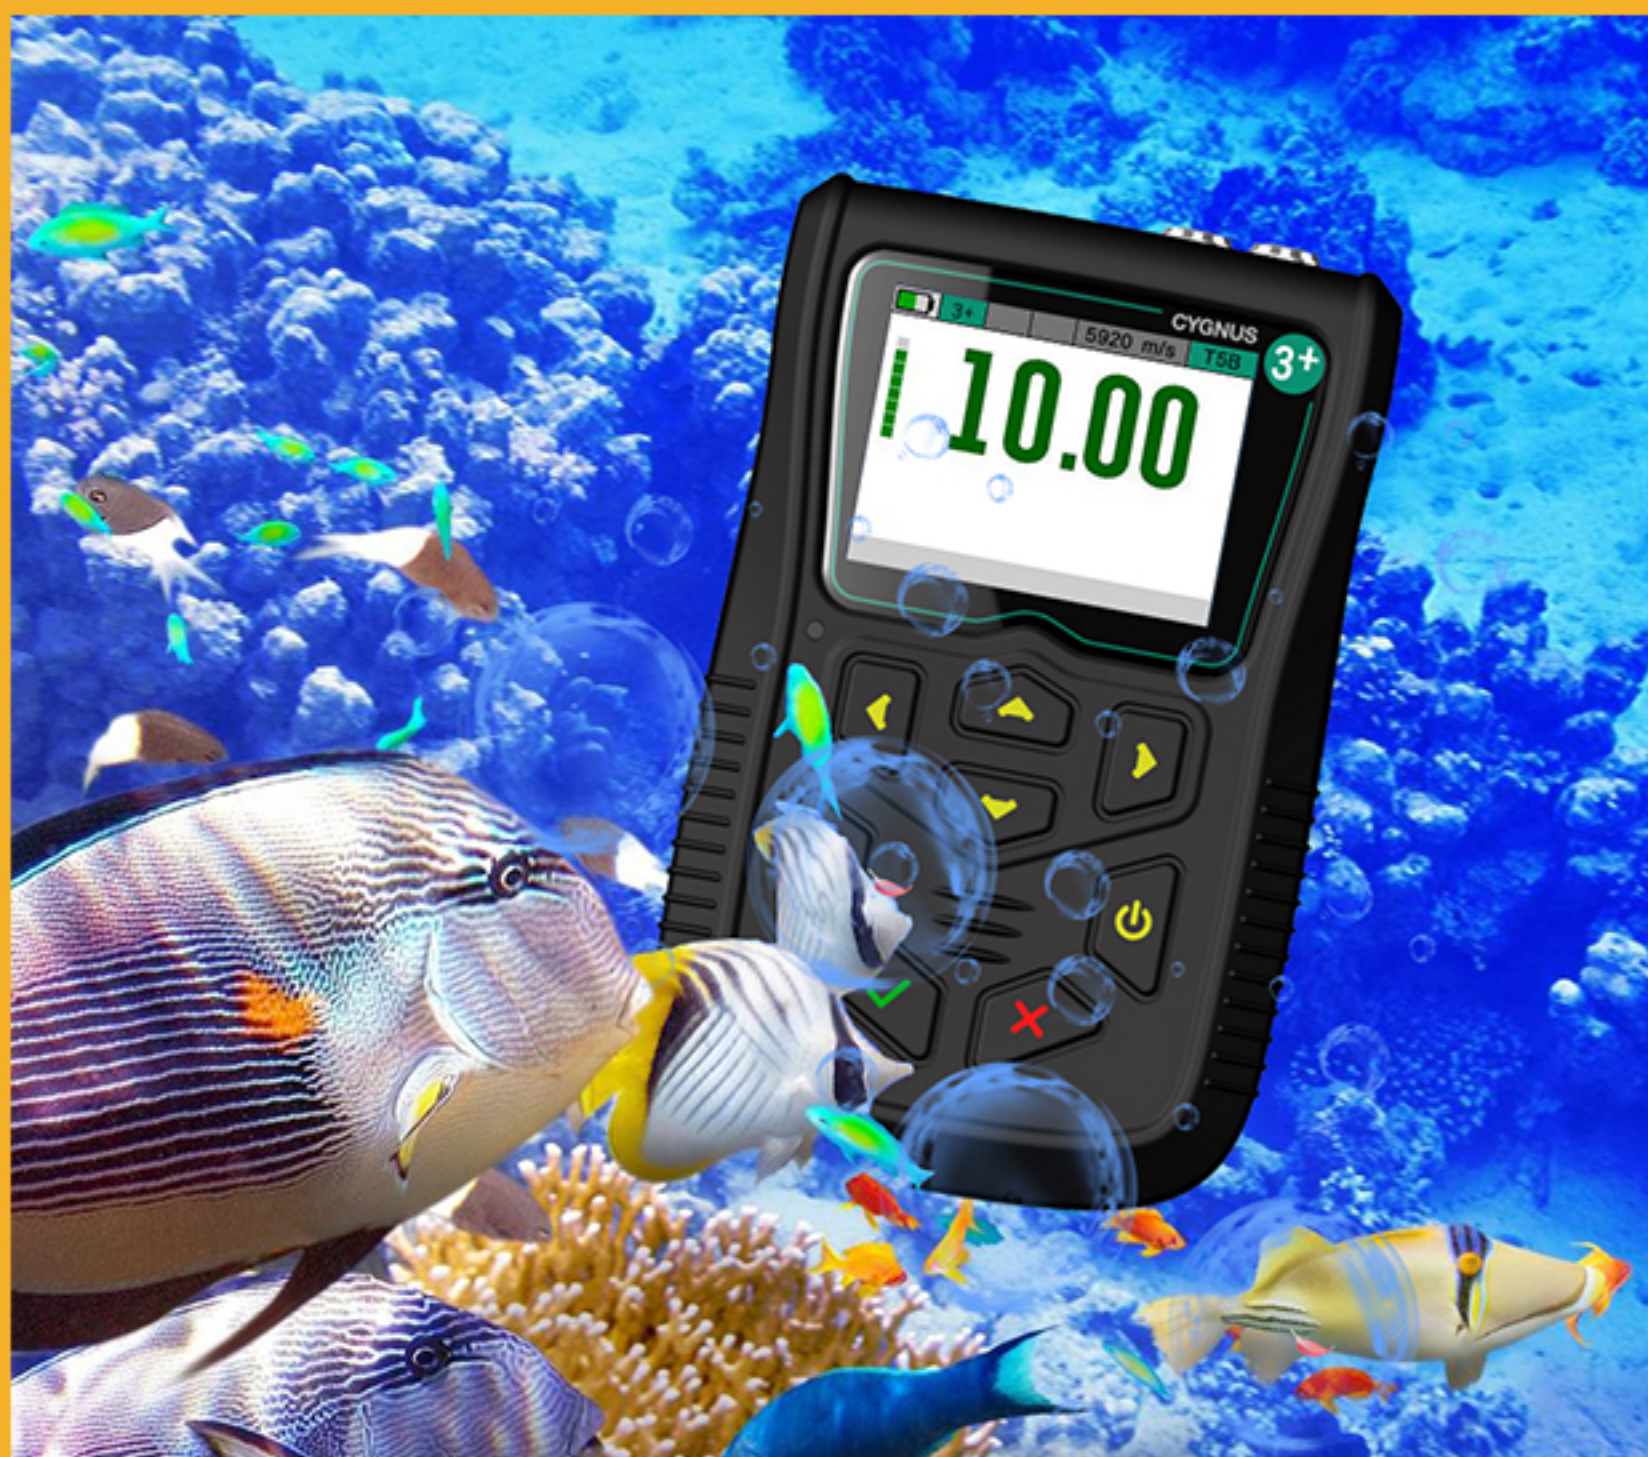


全中文界面显示操作




操作按键分布合理，更人性化设计 按键操作简单易懂



**常规测量模式，适用于被测工件表面无涂镀层
腐蚀比较严重的金属测厚（一次回波模式是默认的
测量设置，如果回波至回波失效，也可以用来测试
严重腐蚀金属，它只需要第一个回波就可以进行测
量，它几乎适合所有的材料和条件）**

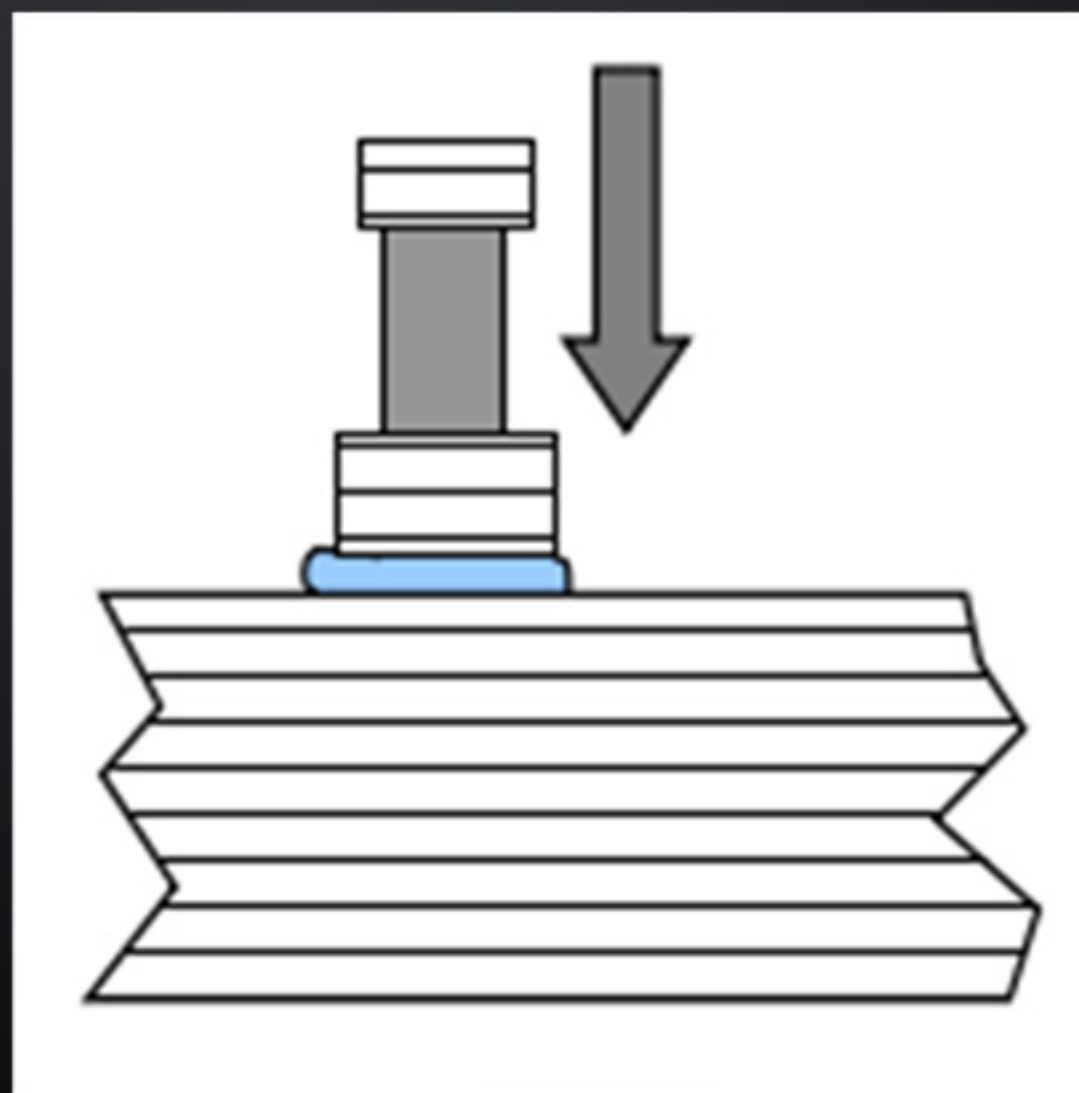

在耦合状态较差，测量数据不稳定时可以通过参考耦合状态百分比提示，读取所测量的数值

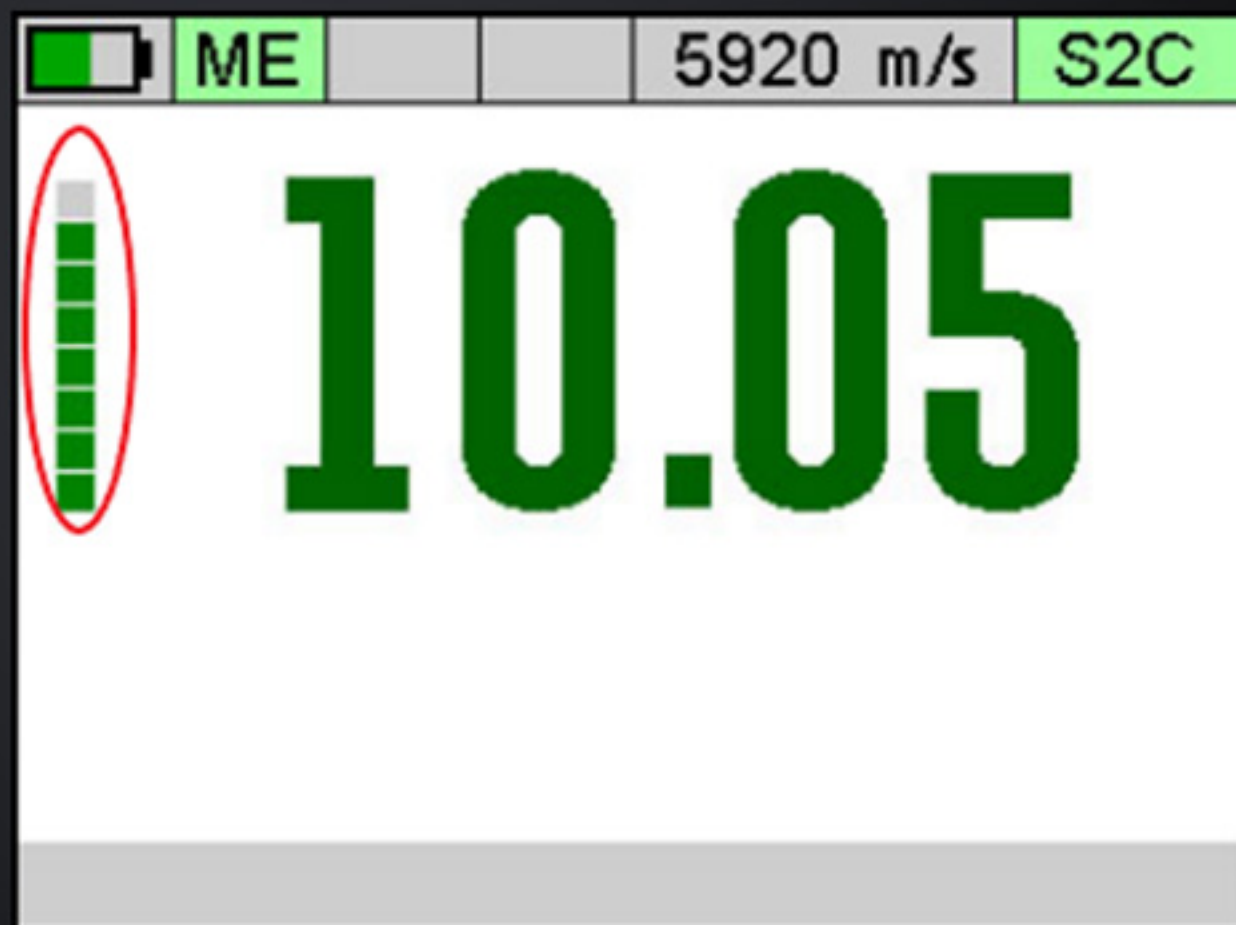

USB 数据接口、SD 卡接口





压力管道



压力容器



船舶工业



石油石化



航空航天



电力设备



工业制造



高校科研



钢结构



军工



核电



铁路